CUTTING MACHINE

C34 EVO 1& 3-PHASE



DIMENSIONS (Cm)	**Effective** 82 x 50 x h.68
	On Pallet 105 x 75 x h.73
WEIGHT (Kg)	**Effective** 235
	On Pallet 250
OIL	With viscosity = 680
	Quantity = 1,5 lt.
ELECTRIC MOTOR	220V/50HZ - 2,2 HP/1,5 kW
	400V/50HZ - 2,2 HP/1,5 kW
RPM	46

Cutting capability	**R. = 65 Kg. / mm²**			**R. = 85 Kg. / mm²**		
	1 Ø 28	*2 Ø 20*	*3 Ø 16*	*1 Ø 26*	*2 Ø 18*	*3 Ø 14*

TECHNICAL FEATURES

- Completely new projected machine body in monoblock made of spheroidal cast iron;
- Gearing in cemented steel;
- Reinforced mechanical parts for a better resistance and performance;
- Higher Cutting capability;
- Special Screw Locator to align perfectely one or more rod between the blades.


OPTIONAL



BASE AND PEDAL


This system is recommended when a working bench is used to lay the bars, allowing the operator to work maintaining a correct posture and minimizing the effort.

STANDARD EQUIPMENT




BLADES

On each cutting machine, 2 hardened steel blades are already fitted.

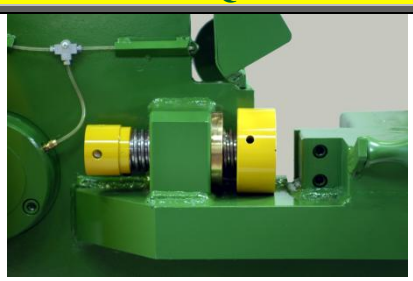

SCREW LOCATOR

Allows perfect alignment of one rod or more between the blades and the achievement of perfectly perpendicular cuts.

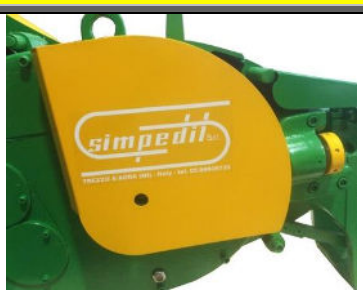

LUBRIFICATION SYSTEM

Thanks to the new construction system, the parts that require it are easily reached by a single point of grazing.

SIMPEDIL S.R.L
(MILANO) – ITALY
Tel. : +39.2.90.93.97.35 – E-mail: info@simpedil.it
www.simpedil.it

** Each machine is available in versions EC or Extra-EC*